

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042114 A2

- (51) International Patent Classification⁷: **C23F 11/00** (74) Agent: **BARKER, Brettell**; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).
- (21) International Application Number: **PCT/GB2003/004796** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: **6 November 2003 (06.11.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **0226101.4** **8 November 2002 (08.11.2002)** **GB**
- (71) Applicant (*for all designated States except US*): **RHODIA CONSUMER SPECIALTIES LIMITED [GB/GB]**; Oak House, Reeds Crescent, Watford, Hertfordshire WD24 4QP (GB).
- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): **GRECH, Jason, Mark [GB/GB]**; 24 Bamburgh Crescent, The Berkeleys, Worcester WR4 0QX (GB). **JONES, Christopher, Raymond [GB/GB]**; 110 Sutherland Road, Cheslyn Hay, Nr. Walsall, South Staffordshire WS6 7BS (GB).
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **WHITE RUST CORROSION INHIBITORS**

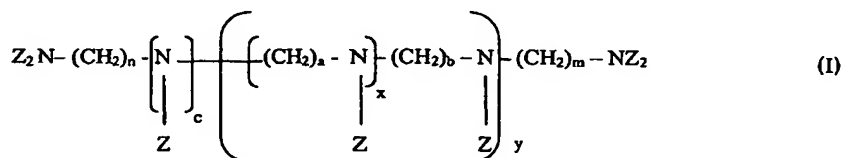

(57) Abstract: A corrosion inhibitor for use in a aqueous system is provided. In particular, the invention especially relates to a compound for use as a white rust corrosion inhibitor and to a composition including such a compound. The white rust corrosion inhibiting compound consists of an organophosphonate having the general formula (I).

WO 2004/042114 A2

WHITE RUST CORROSION INHIBITORS

This invention relates to corrosion inhibitors and in particular to corrosion inhibitors for use in systems where water is used. The present
5 invention especially relates to a compound for use as a white rust corrosion inhibitor and to a composition including such a compound.

Many of the components of water using systems are made of steel, which has been galvanised with zinc or cadmium by various processes, including
10 hot dip. This is done in order to minimise corrosion of the steel. Zinc is the most commonly used metal for galvanising steel.


The zinc plating protects the steel from corrosion. However, the zinc plating reacts with the atmosphere and with water to produce "white rust"
15 which comprises a variety of zinc compounds including, zinc oxide, zinc carbonates and the like. Under these corrosive conditions the zinc coating may not be able to protect the base steel and thus corrosion of the steel may occur reducing the life expectancy of the system. White rust is therefore problematic in water using industries utilising galvanised steel
20 systems. This has been recognised in the industry (as is shown, for example in "White Rust: An Industry update and Guide Paper" published by the Association of Water Technologies, 2002). However, current philosophy in the industry is to concentrate on the treatment and removal of white rust after it has formed, and/or on its avoidance by selecting
25 construction materials which are not susceptible to its formation.

Hitherto, no corrosion inhibitor currently used in water using systems has been found which is able to inhibit effectively the formation of "white rust".

It is an object of the present invention to provide a compound and a composition, each of which is effective for inhibiting "white rust" formation and for ameliorating the problem of corrosion caused by "white rust" in systems that have been galvanised with relatively electropositive metals such as zinc or cadmium, especially with zinc.

The applicant has found that the addition, to water using systems, of certain phosphonated oligomers or of random copolymers of vinylidene diphosphonic acid and vinyl sulphonic acid, or of compositions including such compounds, achieves the aforementioned object.

Accordingly, the present invention provides in a first aspect a compound for use as, or in connection with, a white rust corrosion inhibitor for water-treatment, said compound consisting of an organophosphonate having the general formula (I):

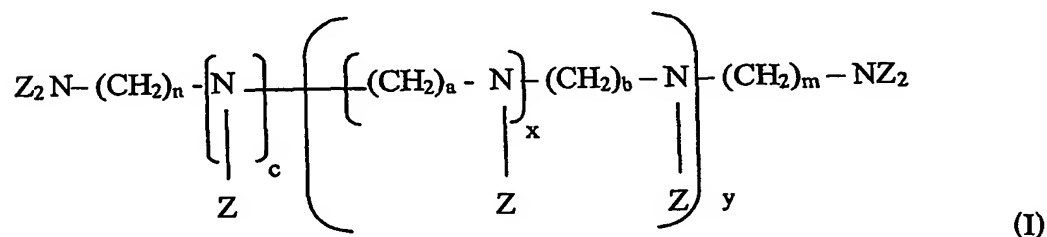

Wherein



R = H, CH₃, C₂H₅ or M

R¹ = H, CH₃, CR₃, C₆H₅, or SO₃H₂

M = alkali metal or ammonium ion

n = 0 to 10

m = 0 to 10

a = 0 to 10

b = 0 to 10


$c = 0$ or 1

$x = 0$ to 10

$y = 0$ to 10

- 5 In a particularly preferred embodiment of the present invention R and R¹ each = H, $n = 6$, $m = 6$, $c = 1$, $y = 0$ whereby the compound is bis(hexamethylene)triamine-pentakis (methylene phosphonic acid), as in formula (II):

10

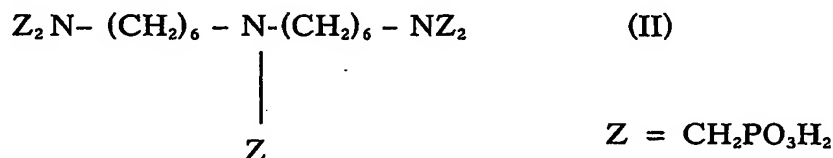

- In a second aspect, the present invention provides a compound for use as a white rust corrosion inhibitor for water-treatment, said compound being
- 15 a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of between 1:1 and 1:500, suitably about 1:100 molar and preferably about 1:20 molar.

- In a third aspect the present invention provides a composition for use as,
- 20 or in connection with a corrosion inhibitor for water-treatment, said composition comprising a phosphonated oligomer according to the first aspect or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid, according to the second aspect, together with additives conventionally used in the water treatment industry. The additives may
- 25 include scale inhibitors such as phosphonates, corrosion inhibitors such as phosphonocarboxylic acids or salts and/or dispersants such as polyacrylates. The composition may optionally incorporate a biocide.

In a fourth aspect, the present invention provides a method for inhibiting corrosion in, or in connection with, a water-using system, said method consisting of the application or addition to said system of an effective amount of a phosphonated oligomer according to the first aspect or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid according to the second aspect or of a composition according to the third aspect.

10 In a preferred embodiment the method according to the fourth aspect consists of the application to a metal prior to contact with water of an effective amount of a phosphonated oligomer according to the first aspect or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid according to the second aspect or of a composition
15 according to the third aspect.

Preferably, in the method according to the fourth aspect of the present invention, the oligomer or co-polymer or composition is used in an effective amount of up to 1000 ppm suitably up to 250 ppm, for example
20 up to 100 ppm

The phosphonocarboxylic acid or salt is preferably a phosphonated oligomer of maleic acid, of general formula (III):



wherein M is a cation such that the oligomer is soluble in water, and n is greater than 1. Such phosphonated oligomer's are disclosed in the applicant's EP-B-0491391 and equivalent publications and are available
30 from the applicant as BRICORR® 288.

The polyacrylate compound is preferably a low molecular weight (MW) polymer, e.g. MW = 2000-5000. However, it is to be understood that other molecular weight ranges can be used.

- 5 The present invention will now be illustrated, merely by way of example, as follows.

Methodology

10 Test Water

Two test waters were used in the Examples herein below. The relevant properties of the test waters are shown in Table 1 (below).

TABLE I

15

	Water 1 (Soft)	Water 2 (Hard)
Calcium Hardness (ppm as CaCO ₃)	0	340
Alkalinity (ppm as CaCO ₃)	500	300
Chloride ion (ppm)	150	50
PH	9	9

The waters shown in TABLE 1 (above) are known to be corrosive to galvanised steel.

20 Test Method

The corrosion testing was carried out on a Rotating Coupon Rig. Each Rig holds 2 coupons. The test water was aerated and the galvanised steel

coupons (50 X 25mm) rotated at 150-160rpm. Water losses due to evaporation were replaced with de-ionised water daily.

5 All inhibitors used in the Examples (below) were weighed out on an analytical balance and added directly to the test water. The (pre-weighed) galvanised steel coupons were then rotated for 7 days at 40°C, cleaned to remove any corrosion deposits with warm (70-80°C) ammonium acetate solution and then rinsed with water and acetone. The galvanised steel coupons were then oven dried and re-weighed.

10

EXAMPLES A TO E

The corrosion-inhibiting properties of six compounds or compositions according to the present invention were assessed by subjecting galvanised steel coupons to the test method described herein above. Also included
15 for comparison are results from tests using phosphonates that are conventionally used as steel corrosion inhibitors (examples G, H and I). The result are shown in TABLE II (below):

TABLE II

Inhibitor used (see notes below)	Inhibitor Level (ppm)	10 Ca ⁺⁺ Water (Soft)	340 Ca ⁺⁺ Water (Hard)
		Corrosion Rate (% of control)	Corrosion Rate (% of Control)
Control	0	100	100
Example (A)	100	20	59.2
Example (B)	100	12	89.2
Example (C)	100	15	93.3
Example (D)	100	14	115
Example (E)	100	20	44.2
Example (F)	100	-	51
Example (G)	100	196	131
Example (H)	100	112	-
Example (I)	100	82	-

Notes to TABLE II

- 5 (A) a (random copolymer of Vinylidene Diphosphonic Acid (VDPA) and Vinyl Sulphonic Acid (VSA) in a 1:20 molar ratio) available from the applicant as ITC 1028;
- 10 (B) a 23% w/w neutral solution of the potassium salt of hexamethylene diamine tetrakis(methylenephosphonic acid), available from the applicant as BRIQUEST ® 462;
- (C) a 25% w/w, neutral, aqueous solution of a sodium salt of pentaethylenhexamine-octakis (methylenephosphonic acid), available from the applicant as BRIQUEST ® 8106-25S;
- 15 (D) a 30% w/w aqueous solution of a sodium salt of N, N-bis (3-aminopropyl)amine-hexakis (methylenephosphonic acid), available from the applicant as BRIQUEST ® 684-30S;
- 20 (E) a 40% w/w aqueous solution of bis(hexamethylene)triamine pentakis(methylenephosphonic acid), available from the applicant as BRIQUEST ® 5123-45A.
- 25 (F) a mixture of BRIQUEST ® 5123-45A with 100ppm of a formulation containing water treatment polymers and a phosphonated oligomer of maleic acid, available from the applicant as BRICORR ® 288C.
- (G) BRICORR ® 288C on its own.
- 30 (H) a 60% w/w aqueous solution of 1-hydroxyethane-1,1-diphosphonic acid available from the applicant as BRIQUEST ® ADPA-60A


- (I) a 50% w/w aqueous solution of Nitrilotris(methylenephosphonic acid) available from the applicant as BRIQUEST® 301-50A

It will be apparent from TABLE I that inhibitor (E) gives the best all-
5 round performance.

7rt80

CLAIMS

1. A compound for use as, or in connection with, a white rust corrosion inhibitor for water-treatment, said compound consisting of an organophosphonate having the general formula (I):

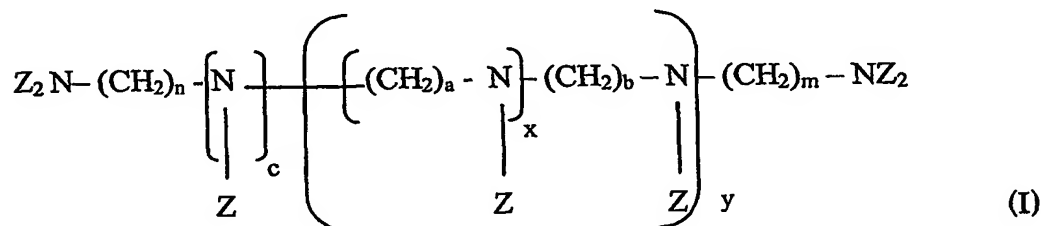

Wherein

$Z = -CHR_1PO_3R_2$

$R = H, CH_3, C_2H_5$ or M

10 $R^1 = H, CH_3, CR_3, C_6H_5$, or SO_3H_2

$M =$ alkali metal or ammonium ion

$n = 0$ to 10

$m = 0$ to 10

$a = 0$ to 10


15 $b = 0$ to 10

$c = 0$ or 1

$x = 0$ to 10

$y = 0$ to 10

- 20 2. A compound as claimed in Claim 1, in which R and R^1 each = H , $n = 6$, $m = 6$, $c = 1$, $y = 0$ whereby the compound is bis(hexamethylene)triamine-pentakis (methylene phosphonic acid), as in formula (II):

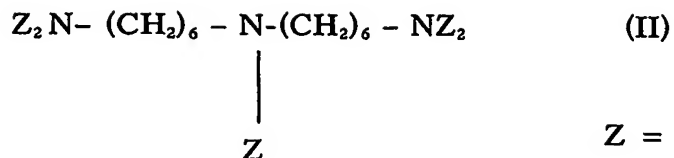

3. A compound for use as a white rust corrosion inhibitor for water-treatment, said compound being a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of
5 between 1:1 and 1:500.
4. A compound as claimed in Claim 3, in which the molar ratio is 1:100 molar.
- 10 5. A compound as claimed in Claim 3 or Claim 4, in which the molar ratio is 1:20 molar.
6. A composition for use as, or in connection with a corrosion inhibitor for water-treatment, said composition comprising a
15 phosphonated oligomer according to Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid, according to Claim 2, together with additives conventionally used in the water treatment industry.
- 20 7. A composition as claimed in Claim 6 in which the additives are selected from the group consisting of phosphonocarboxylic acids or salts and dispersants.
8. A composition as claimed in Claim 6 or Claim 7 in which the
25 dispersant is a polyacrylate.

9. A composition as claimed in any one of Claims 6 to 8 in which the composition comprises a biocide.

10. A composition as claimed in any one of Claims 6 to 9 in which the
5 phosphonocarboxylic acid or salt is a phosphonated oligomer of maleic acid, of general formula (III):



10 wherein M is a cation such that the oligomer is soluble in water, and n is greater than 1.

11. A composition as claimed in any one of Claims 6 to 9, in which the
15 polyacrylate compound is a low molecular weight polymer having a molecular weight between 2000 to 5000.

12. A method for inhibiting corrosion in, or in connection with, a
water-using system, said method consisting of the application or addition
to said system of an effective amount of a phosphonated oligomer
20 according to Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid according to Claim 2 or of a composition according to Claim 3.

13. A method as claimed in Claim 12 in which the method consists of
25 the application to a metal prior to contact with water of an effective amount of a phosphonated oligomer according to Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid according to Claim 2 or of a composition according to Claim 3.

14. A method as claimed in Claim 12 or 13, in which the oligomer or copolymer is used in an effective amount of up to 1000 ppm.

15. A method as claimed in Claims 12 to Claim 14, in which the
5 oligomer or copolymer is used in an effective amount of up to 250 ppm.

16. A method as claimed in any one of Claims 12 to 15 in which the oligomer or copolymer is used in an effective amount of up to 100 ppm.

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042114 A3

- (51) International Patent Classification⁷: **C23F 11/167**, 11/173, 11/10
- (21) International Application Number: PCT/GB2003/004796
- (22) International Filing Date: 6 November 2003 (06.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0226101.4 8 November 2002 (08.11.2002) GB
- (71) Applicant (for all designated States except US): **RHODIA CONSUMER SPECIALTIES LIMITED** [GB/GB]; Oak House, Reeds Crescent, Watford, Hertfordshire WD24 4QP (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GRECH, Jason, Mark** [GB/GB]; 24 Bamburgh Crescent, The Berkeleys, Worcester WR4 0QX (GB). **JONES, Christopher, Raymond** [GB/GB]; 110 Sutherland Road, Cheslyn Hay, Nr. Walsall, South Staffordshire WS6 7BS (GB).
- (74) Agent: **BARKER, Brettell**; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report: 2 December 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WHITE RUST CORROSION INHIBITORS

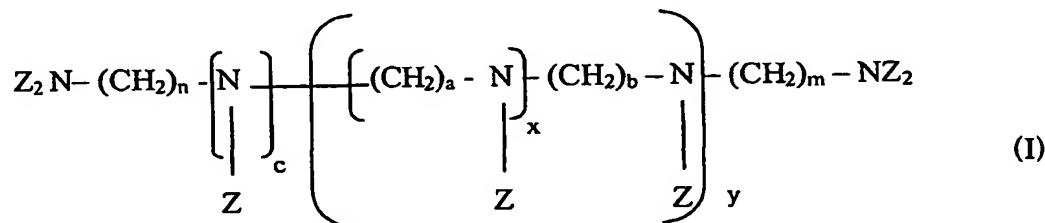

(57) Abstract: A corrosion inhibitor for use in a aqueous system is provided. In particular, the invention especially relates to a compound for use as a white rust corrosion inhibitor and to a composition including such a compound. The white rust corrosion inhibiting compound consists of an organophosphonate having the general formula (I).

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042114 A3

- (51) International Patent Classification⁷: C23F 11/167, 11/173, 11/10
- (21) International Application Number:
PCT/GB2003/004796
- (22) International Filing Date:
6 November 2003 (06.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0226101.4 8 November 2002 (08.11.2002) GB
- (71) Applicant (for all designated States except US): RHODIA CONSUMER SPECIALTIES LIMITED [GB/GB]; Oak House, Reeds Crescent, Watford, Hertfordshire WD24 4QP (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GRECH, Jason, Mark [GB/GB]; 24 Bamburgh Crescent, The Berkeleys, Worcester WR4 0QX (GB). JONES, Christopher, Raymond [GB/GB]; 110 Sutherland Road, Cheslyn Hay, Nr. Walsall, South Staffordshire WS6 7BS (GB).
- (74) Agent: BARKER, Brettell; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— with amended claims
- (88) Date of publication of the international search report:
2 December 2004
- Date of publication of the amended claims: 13 January 2005
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WHITE RUST CORROSION INHIBITORS

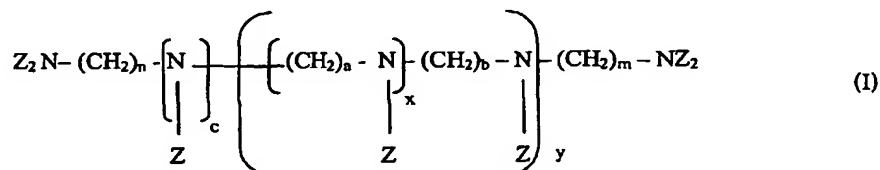


(57) Abstract: A corrosion inhibitor for use in a aqueous system is provided. In particular, the invention especially relates to a compound for use as a white rust corrosion inhibitor and to a composition including such a compound. The white rust corrosion inhibiting compound consists of an organophosphonate having the general formula (I).

AMENDED CLAIMS

[Received by the International Bureau on 08 November 2004 (08.11.2004);
original claims 1-16 replaced by amended claims 1-16 (2 pages)]

1. Use of an organophosphonate having the general formula (I):

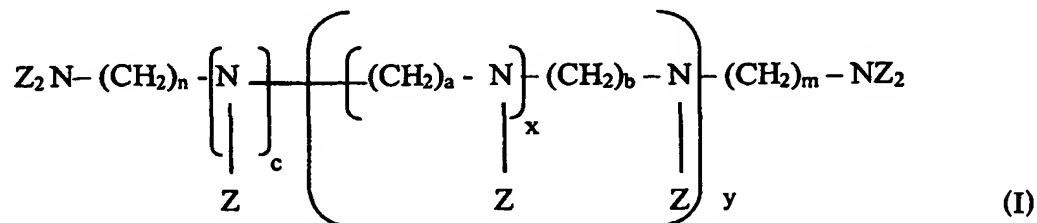

5 wherein

$Z = -CHR_1PO_3R_2$

$R = H, CH_3, C_2H_5$ or M

$R^1 = H, CH_3, CR_3, C_6H_5$, or SO_3H_2

$M =$ alkali metal or ammonium ion

10 $n = 0$ to 10

$m = 0$ to 10

$a = 0$ to 10

$b = 0$ to 10


$c = 0$ or 1

15 $x = 0$ to 10

$y = 0$ to 10

to inhibit white rust corrosion in water using systems.

2. Use as claimed in Claim 1, in which R and R^1 each = H , $n = 6$, m
20 $= 6$, $c = 1$, $y = 0$ whereby the compound is
bis(hexamethylene)triamine-pentakis (methylene phosphonic acid), as in
formula (II):



3. Use of a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of between 1:1 and 1:500 to inhibit white corrosion in water using systems.
- 5 4. A compound as claimed in Claim 3, in which the molar ratio is 1:100 molar.
- 10 5. Use as claimed in Claim 3 or Claim 4, in which the molar ratio is 1:20 molar.
- 15 6. Use of a composition comprising a phosphonated oligomer of formula (I) as defined in Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of between 1:1 and 1:500, together with additives conventionally used in the water treatment industry to inhibit white rust corrosion in water using systems.
- 20 7. Use as claimed in Claim 6 in which the additives are selected from the group consisting of phosphonocarboxylic acids or salts and dispersants.
8. Use as claimed in Claim 7 in which the dispersant is a polyacrylate.
- 25 9. A composition as claimed in any one of Claims 6 to 8 in which the composition comprises a biocide.

10. Use as claimed in any one of Claims 6 to 9 in which the phosphonocarboxylic acid or salt is a phosphonated oligomer of maleic acid, of general formula (III):



wherein M is a cation such that the oligomer is soluble in water, and n is greater than 1.

10 11. Use as claimed in any one of Claims 6 to 9, in which the polyacrylate compound is a low molecular weight polymer having a molecular weight between 2000 to 5000.

12. A method for inhibiting corrosion in, or in connection with, a
15 water-using system, said method consisting of the application or addition to said system of an effective amount of a phosphonated oligomer of formula (I) as defined in Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of between 1:1 and 1:500 or of a composition comprising a phosphonated oligomer of
20 formula (I) as defined in Claim 1 or a random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid in a molar ratio of between 1:1 and 1:500, together with additives conventionally used in the water treatment industry to inhibit white rust corrosion in water using systems..

25 13. A method as claimed in Claim 12 in which the method consists of the application to a metal prior to contact with water of an effective amount of the phosphonated oligomer or the random copolymer of vinylidene diphosphonic acid and vinyl sulphonic acid or of the composition.

30

14. A method as claimed in Claim 12 or 13, in which the oligomer or copolymer is used in an effective amount of up to 1000 ppm.

15. A method as claimed in Claims 12 to Claim 14, in which the
5 oligomer or copolymer is used in an effective amount of up to 250 ppm.

16. A method as claimed in any one of Claims 12 to 15 in which the oligomer or copolymer is used in an effective amount of up to 100 ppm.

10